

## BTS PANEL ANTENNA

### 2400 MHz SINGLE BAND ANTENNA

**Model:KE24X6518-DT0/3/6**



**Dual-Polarization Antenna, 2400-2500MHz, 65° horizontal beamwidth, Fixed electrical tilt**

- Rugged and reliable design
- Excellent passive intermodulation suppression

#### Electrical Specifications


Band Of Operation, MHz	2400 ~ 2500
Gain in dBi	18
HBW(degrees)	65
VBW(degrees)	6.5
Electrical Tilt (Degrees)	0/3/6
Polarization (Degrees)	± 45
Impedance (Ohms)	50
1st Null Fill dB	>-25dB
VSWR	≤ 1.5
IM3(@2x43 dbm)	< - 107
Upper Side Lobe Suppression; dB	≥16
Cross Polar Discrimination,dB	Main > 15dB, ±60°>10dB or ±30°>10dB
Front-to-Back Ratio;dB	≥25
Isolation Between Ports,dB	≥30
Max. Input Power per Input (Watts)	100

## 2400 MHz SINGLE BAND ANTENNA


**Model:KE24X6518-DT0/3/6**

Mechanical Specifications	
Dimensions (L x W x H in mm)	1075 X 195 X 95
<b>Weight(Kgs):</b>	
Antenna	6.5
Bracket	5
Radome Material	ABS Plastic/Fiberglass
Connector Type	7/16 DIN female
Connector Position	Bottom
No. of connectors	2
Operating Temperature(°C)	- 40 ° to + 60 °
Rated Wind Speed(Km/Hr)	198
Lightening Protection	Direct ground

## Radiation Pattern

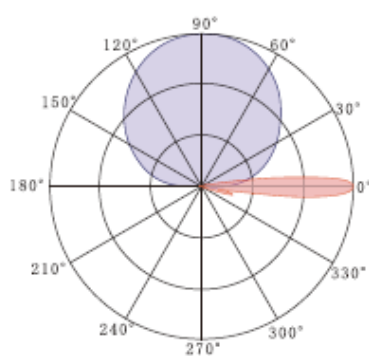

2400MHz

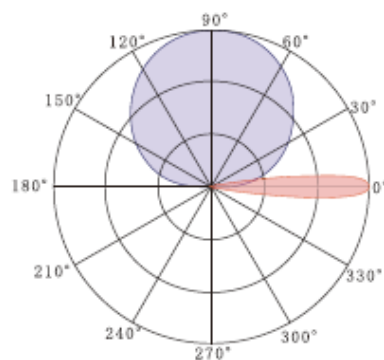

2500MHz